



Shenzhen Trismart Lighting Technology Co., Ltd. is a research and development, design, production and sales of private high-tech enterprises. Company's management and technical team has 20 years' experience in the development and design of industrial lightings, professional lightings and lighting engineering systems. The chairman of the company, Dr. Chen, is the member of China Lighting Society, the Deputy Secretary General of the Shenzhen Lighting Appliance Association and a senior expert of Shenzhen Lighting Society. Trismart Lighting is a cooperative supplier of European Union led street lamps, a network supplier of Royal Shell (shell) and a network supplier of large enterprises such as Sinopec, PetroChina, State Grid, Datang Electric Power and Huadian Group.




# Solar Led Street Light

## two in one




SZG574 two in one solar led street light with **dark sky** is an intelligent solar lighting system with easy to purchase, low shipping costs, quick installation and simple maintenance. The system only consists of two main parts: one is solar panel part including solar panel and bracket, the other is lamp head part including street light, built in lithium phosphate battery, built in solar controller and integrated microwave sensor optional. It meets the requirement of dark sky without any light pollution.

It adopts Philips 5050 led chip with 230 lm/W luminous efficiency which can increase the brightness by more than 50%, power lithium phosphate battery with more than 3000 cycle lifespan, MPPT intelligent solar controller with IPT, and polysilicon solar panels with a conversion efficiency of more than 20%.

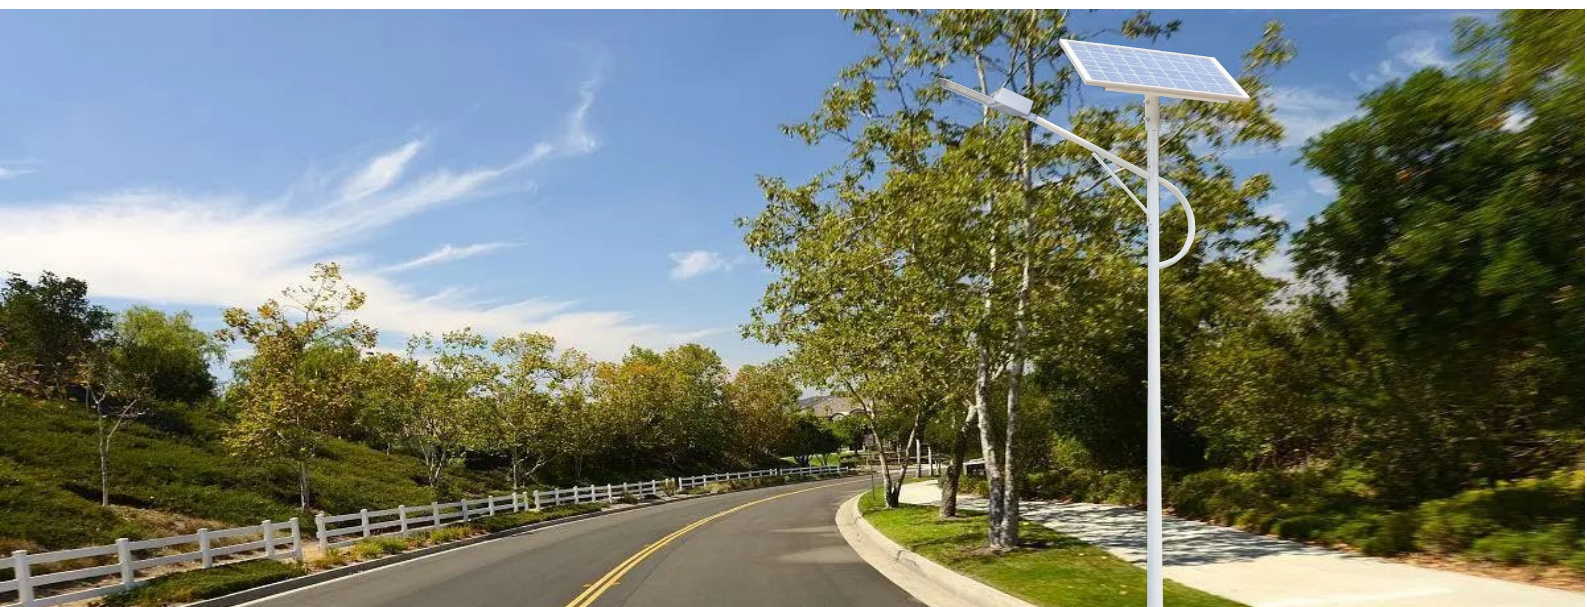

super brightness



MPPT intelligent  
solar controller



microwave sensor



Li-battery  
management system



2.4G remote  
operation



Li-battery  
monitor system



# Trismart Lighting


## Philips

super brightness 5050 led chip




### Super brightness Philips 5050 led chip

- **luminous efficiency of led chip:** 230 lm/W
- **light efficiency of luminaire:** >190 lm/W
- **meet the requirement of dark sky**
- The thermal resistance is only 3°C and 75% lower
- The illuminance is 50% higher
- average service life: ≥100,000 hours
- no blue light hazard

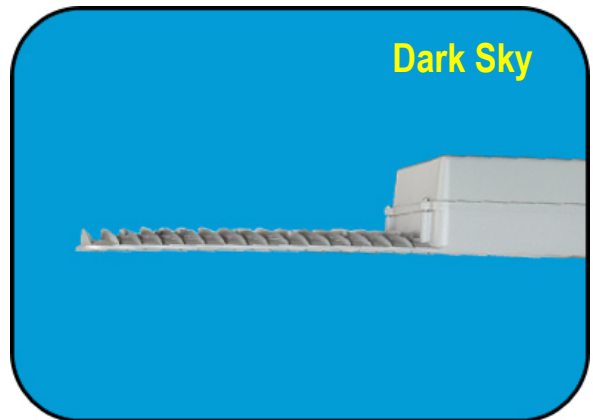


# Trismart Lighting

## Powerful lithium iron phosphate battery

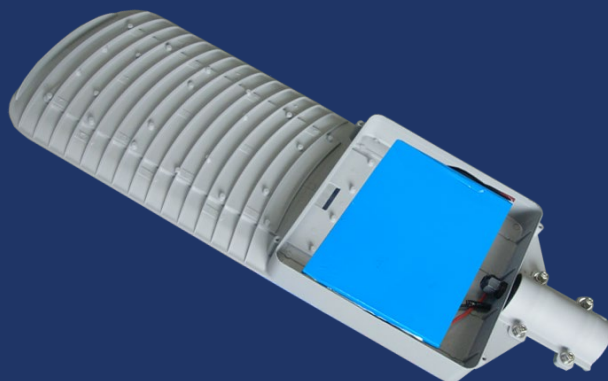

### Power lithium iron phosphate battery

- used for electric car, electric bike, solar light, energy storage
- cycle life:  $\geq 3000$  cycles for more than 8 years' use
- Cycle life:  $\geq 3000$  cycles for more than 8 years' lifespan
- Cell capacity:  $\geq 6000\text{mAh}$
- Less than  $3\text{m}\Omega$  internal resistance can reduce internal energy loss and offer higher current discharge.
- High temperature discharge efficiency:  $\geq 95\%$
- Low temperature discharge efficiency:  $\geq 70\%$
- free of cobalt and other heavy metals
- no fire, no explosion, absolutely safe and reliable
- **Large battery cavity, battery pack built in the lamp head, beautiful coordination and easy maintenance.**



### Intelligent solar controller

- Adopting MPPT technology to track the maximum power of solar panel
- MPPT efficiency:  $\geq 99.9\%$
- Charge conversion efficiency:  $\geq 98.5\%$  (MPPT)
- Constant current drive efficiency:  $\geq 96\%$  (MPPT)
- IPT(intelligent power technology) can adjust the optimal power according to the weather conditions of the next 7 days and the remaining energy of the battery pack to ensure 365 days' lighting every day.
- Control mode: light control, time control, induction control
- 2.4G remoter optional
- **Solar controller is built in the shell of lamp.**





2.4G remoter



# Trismart Lighting


## MPPT

intelligent solar controller

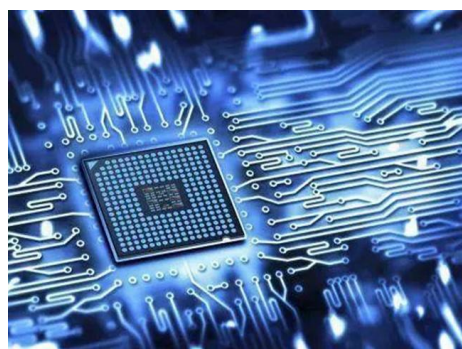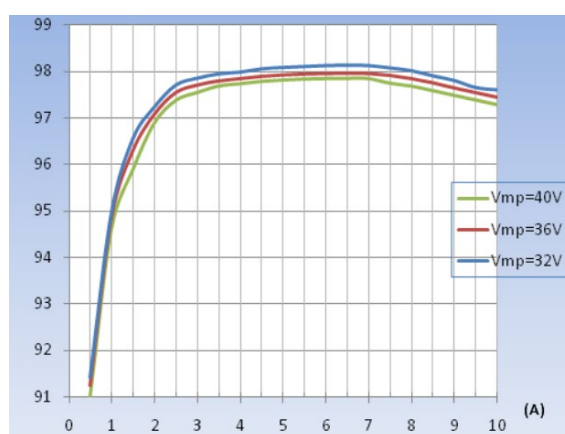


### Intelligent power technology

According to the weather conditions of the next 7 days and the remaining energy of the battery, the power of the light can be adjusted to the optimal value through automatic calculation and scientific evaluation under the premise of ensuring the illumination to meet lighting for 365 days and extend cycle life of battery.

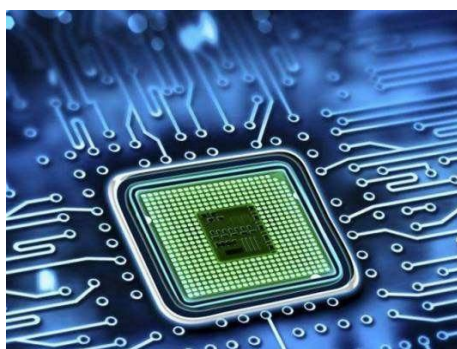

### Single Monitoring and balanced charging Technology :

Through monitoring the voltage and current of the single cell in real time and optimizing the calculation, solar controller outputs the optimal charging voltage and current to reach the balanced charging for each cell which will prolong lifespan of battery.

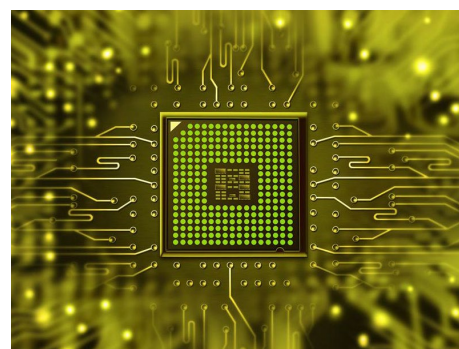


### Automatic alarm technology:

Collecting the output voltage and current of solar panel, the voltage and current of battery and led modular in real time by intelligent chip, the working state of each part is detected and judged, and the fault alarm occurs automatically. Through different indicator lights, it is convenient for maintenance personnel to judge the problem intuitively and quickly.



# Microwave sensor

Microwave sensors *detect* the human body motion by emitting high-frequency radio waves. When human motion is detected, the microwave sensor is triggered and the lamp becomes 100% brightness. When the human body has left the lamp, the microwave sensor closes the trigger and the lamp becomes weak light, which can extend the lighting time.

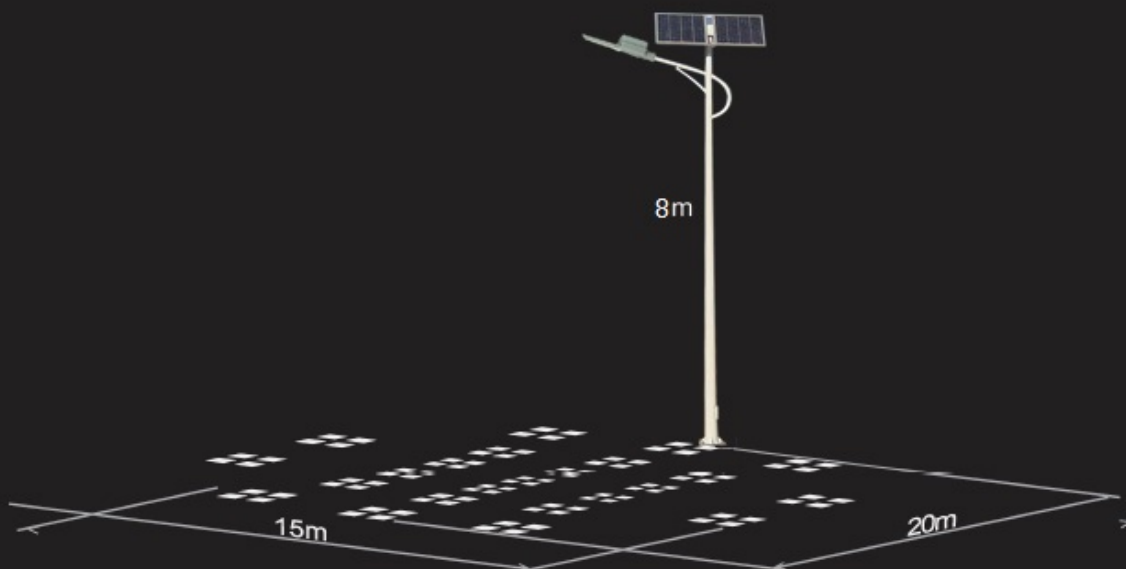


only for reference

# Trismart Lighting

## Thermal management

### Thermal management


- Using high thermal conductivity aviation aluminum alloy material and formed by precision die-casting, the heat dissipation speed is fast.
- Finite element analysis technology is used to optimize the heat dissipation structure design and control temperature rise of each component of the lamp.

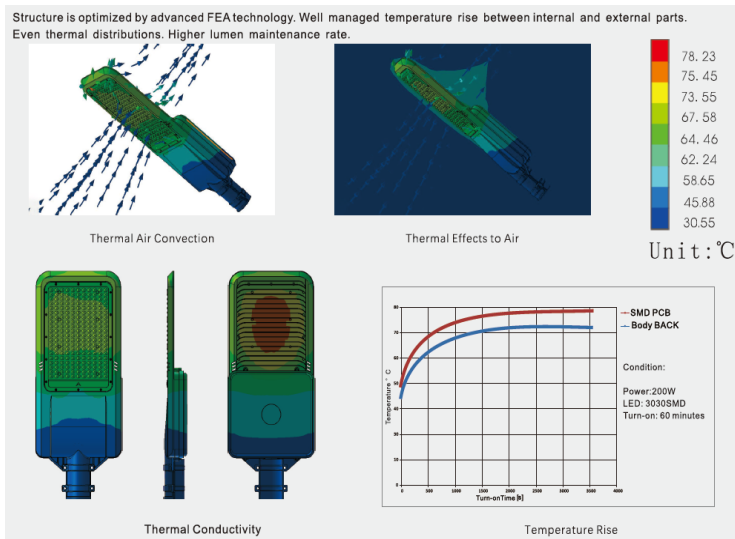

## Technical parameters:

Parameter items	30W	50W	65W	80W	100W
Brand of led chip	Philips	Philips	Philips	Philips	Philips
Luminous efficiency for led (lm/W)	230 lm/W	230 lm/W	230 lm/W	230 lm/W	230 lm/W
Luminaire luminous flux (lm)	6900±5% lm	11500±5% lm	14500±5% lm	18000±5% lm	23000±5% lm
Light efficiency of luminaire (lm/W)	>190 lm/W	>190 lm/W	>190 lm/W	>190 lm/W	>190 lm/W
Beam angle	140°*70°	140°*70°	140°*70°	140°*70°	140°*70°
Correlated color temperature (K)	3000-6500K	3000-6500K	3000-6500K	3000-6500K	3000-6500K
Color rendering index (Ra)	75Ra	75Ra	75Ra	75Ra	75Ra
LED lifespan (h)	100000 hrs	100000 hrs	100000 hrs	100000 hrs	100000 hrs
Type of battery	LiFePO <sub>4</sub> battery	LiFePO <sub>4</sub> battery	LiFePO <sub>4</sub> battery	LiFePO <sub>4</sub> battery	LiFePO <sub>4</sub> battery
Capacity of battery	220Wh	330Wh	530Wh	620Wh	790Wh
Lifespan of battery	≥3000 cycle	≥3000 cycle	≥3000 cycle	≥3000 cycle	≥3000 cycle
Charging time (h)	6-7 hrs	6-7 hrs	6-7 hrs	6-7 hrs	6-7 hrs
Continuous rainy days	3 days	3 days	3 days	3 days	3 days
Dark sky requirement	meet	meet	meet	meet	meet
Microwave sensor	optional	optional	optional	optional	/
Power of poly solar panel	40W	60W	80W	100W	120W
Material of shell	die-cast aluminum	die-cast aluminum	die-cast aluminum	die-cast aluminum	die-cast aluminum
Discharging temperature	-20~+60℃	-20~+60℃	-20~+60℃	-20~+60℃	-20~+60℃
Charging temperature	-5~+55℃	-5~+55℃	-5~+55℃	-5~+55℃	-5~+55℃
IP protection	IP66	IP66	IP66	IP66	IP66
Lamp dimension	710*265*100 mm	710*265*100 mm	710*265*100 mm	710*265*100 mm	710*265*100 mm
Lamp weight	3.8 Kg	4.6 Kg	5.6 Kg	6.6 Kg	7.2 Kg
Diameter of mounting pipe	φ 60 mm	φ 60 mm	φ 60 mm	φ 60 mm	φ 60 mm
Recommended mounting height	6 m	7 m	8 m	9 m	10 m

**Note:** Please select the power of lamp according to the recommended mounting height.

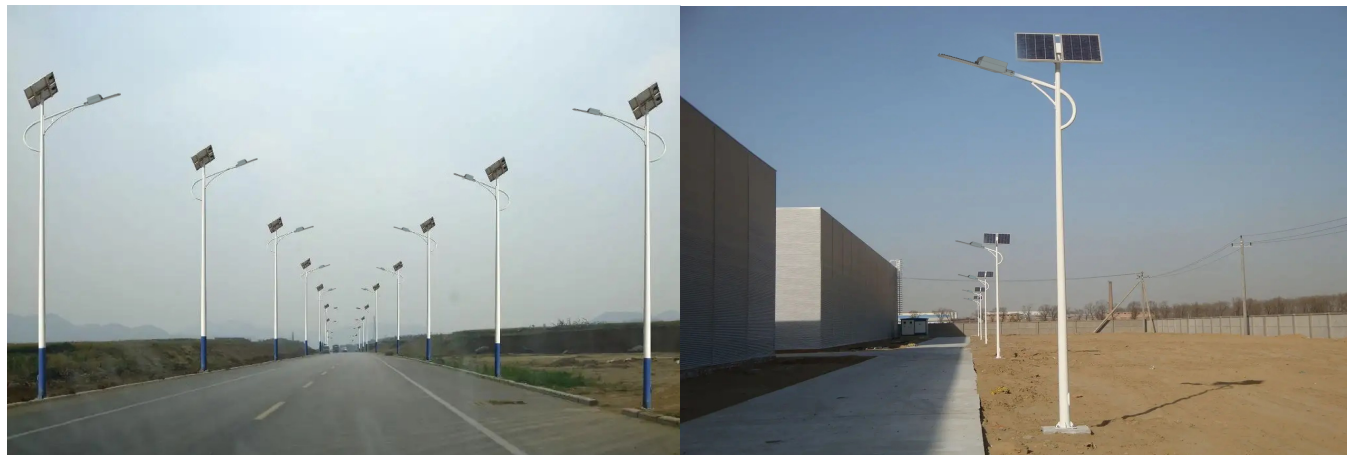





# Trismart Lighting


speciality builds higher quality



energy-saving



quality



intelligent

**Address:** 4F, Building 9, Dongjin Road, Guangming District, Shenzhen, P.R.China

Website: [www.sztrismart.com](http://www.sztrismart.com)

Email: [dr.chen@sztrismart.com](mailto:dr.chen@sztrismart.com)